


200X1200MM



BE
RGA
MO
COLLECTION



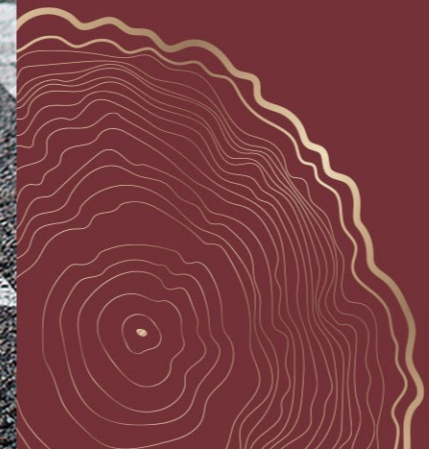

Magical Meeting of Life and Nature.



200X1200MM

The most important truths are hidden, but this doesn't mean that they don't exist. They are just difficult to find. Geogres is a wood-effect surface contaminated with dusty colours that bring to mind the ancestral charm of the earth and a naturalness made up of sophisticated details.



www.sponzoceramica.com



A Decor Shining With Flawless Wood



200x1200mm

The naturalness of the series is enhanced by the surface microstructure, perfectly coinciding with the very high resolution graphics, a production synergy that descends from the most advanced digital technology.

4

Colour
4 Colour



Ash



Cedar



Maple



Teak



1
Finish



Matt


1
size

20x120 cm






Unleash creativity with Bergamo's handpicked selection of 07 random tile masterpieces. From vibrant colors to timeless elegance, each design exudes charm and individuality. Embrace nature's beauty with tranquil landscapes, or go rustic for a cozy retreat. Our modern and artistic tiles are perfect for contemporary spaces, while playful patterns let your imagination soar.

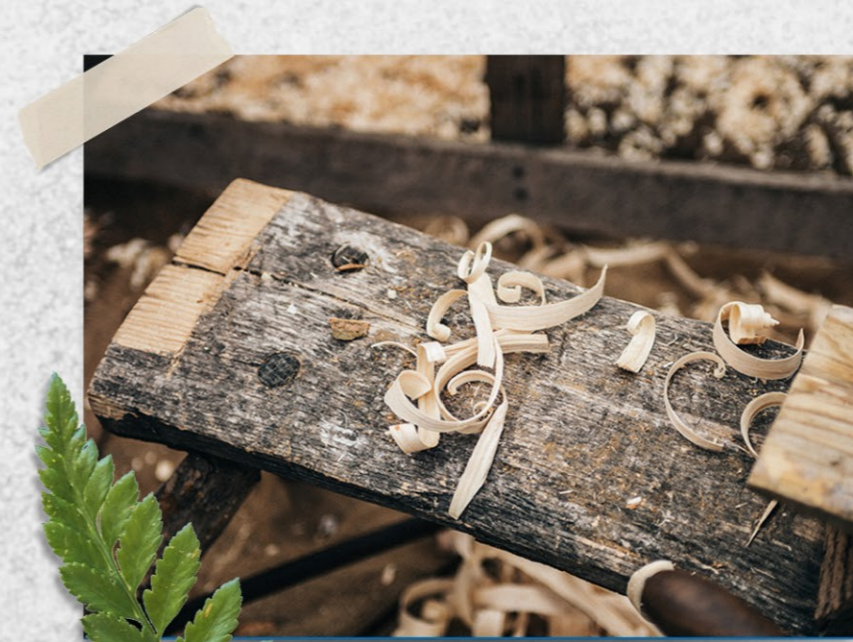

20x120 cm

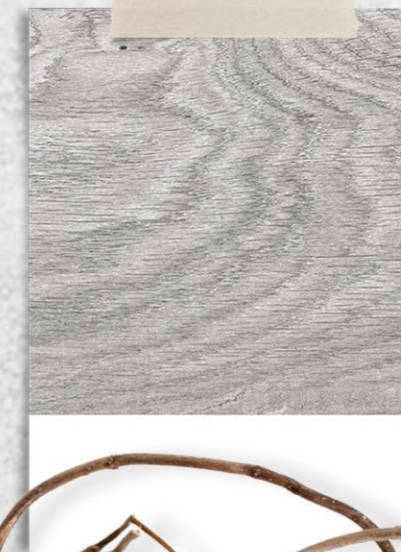

Bargamo

Ash





Bergamo Ash

BERGAMO

ASH


**200X
1200MM**

**7
RANDOM**





20x120 cm

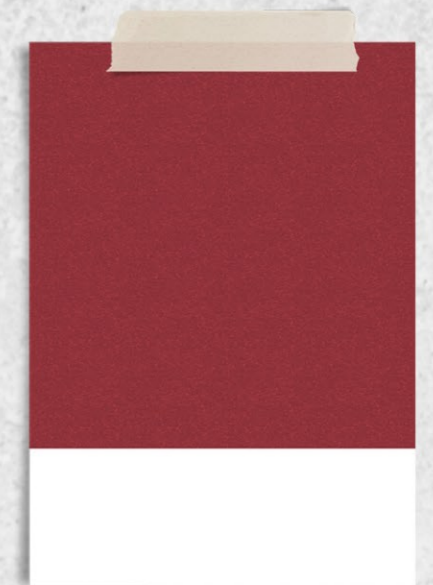

Bargamo

Cedar





Bergamo Cedar

BERGAMO CEDAR


**200X
1200MM**

**7
RANDOM**





20x120 cm

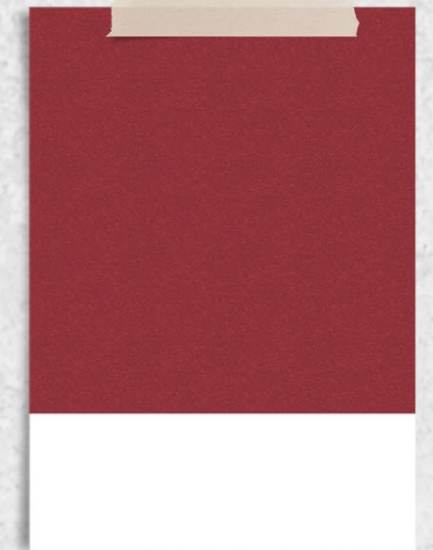

Bargamo

Maple






Beragmo **Maple**

BERGAMO MAPLE



**200X
1200MM**

**7
RANDOM**



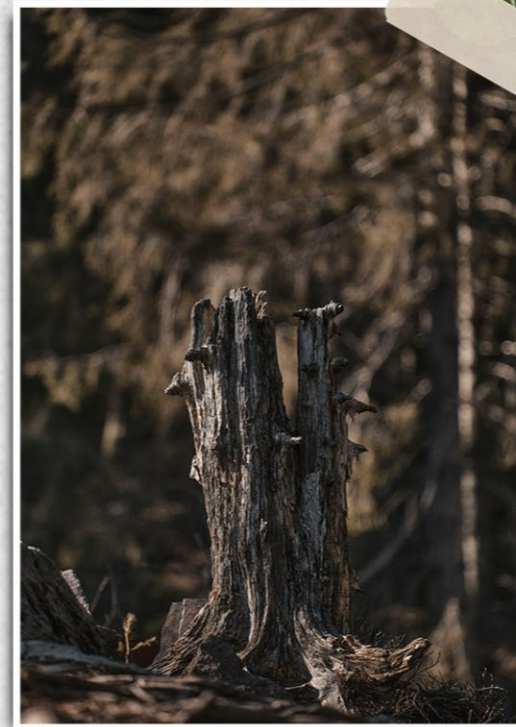

20x120 cm

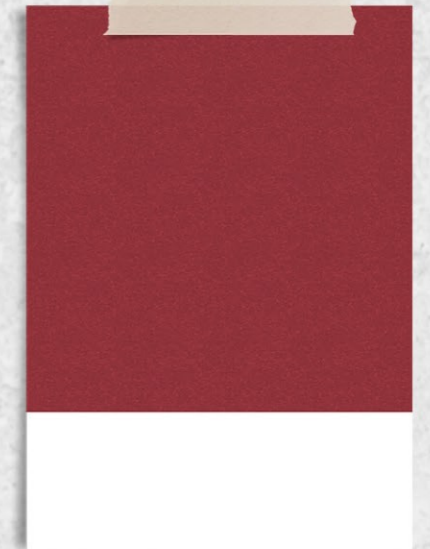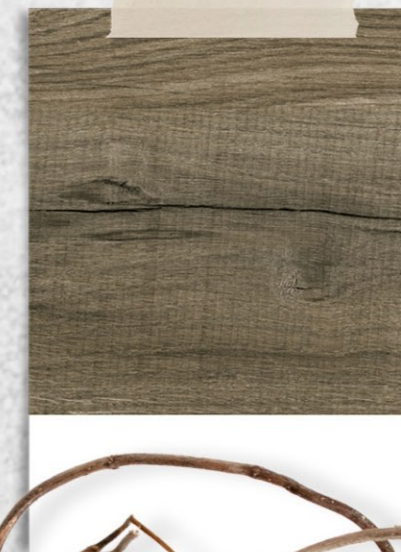

Bargamo


Teak



CERPT



SPONZO
CERAMICA

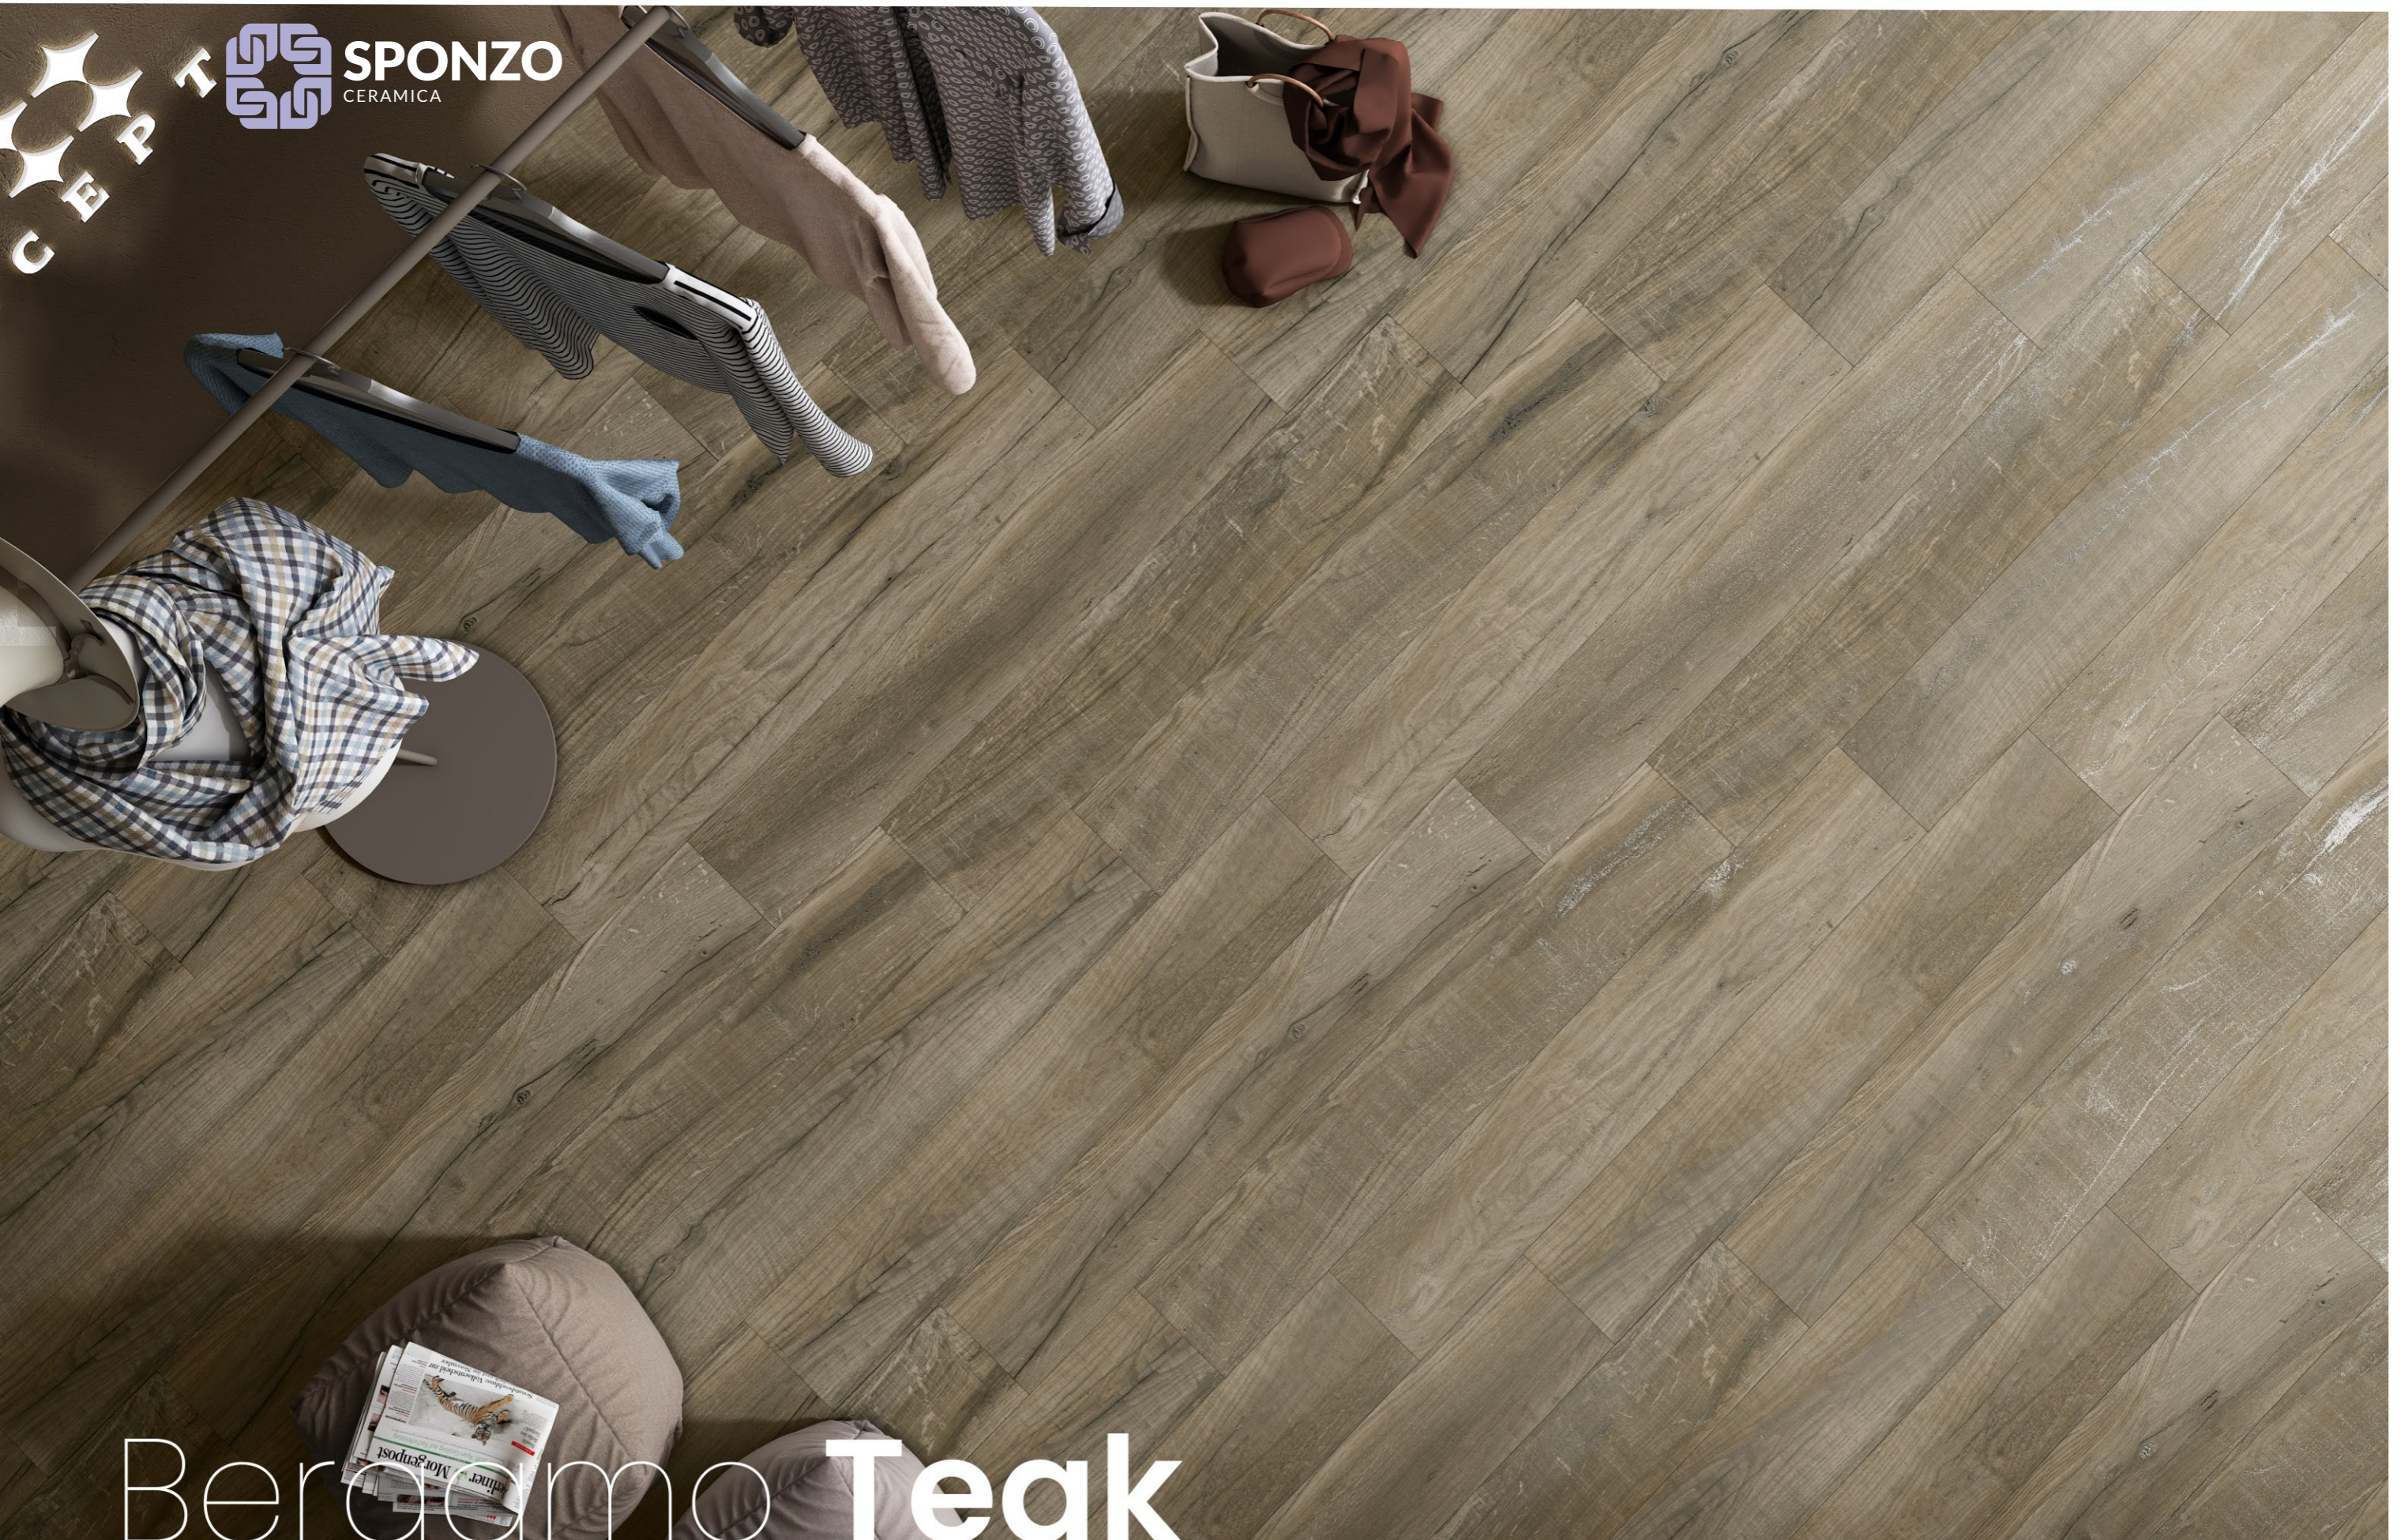

Berodamo Teak


www.sponzoceramica.com

BERGAMO TEAK

**200X
1200MM**

**7
RANDOM**



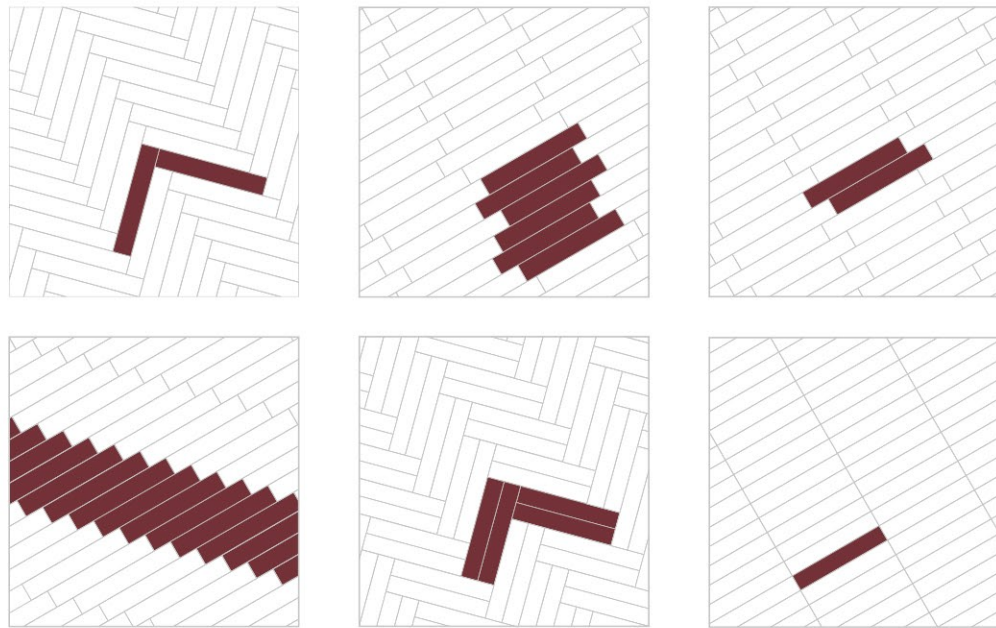


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	≤ 0,5%	In According	
		Breaking strength	S ≥ 1300 N	S ≥ 2000 N	
		Modulus of rupture	R ≥ 35 N/mm ²	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	9 x 10 ⁻⁶ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

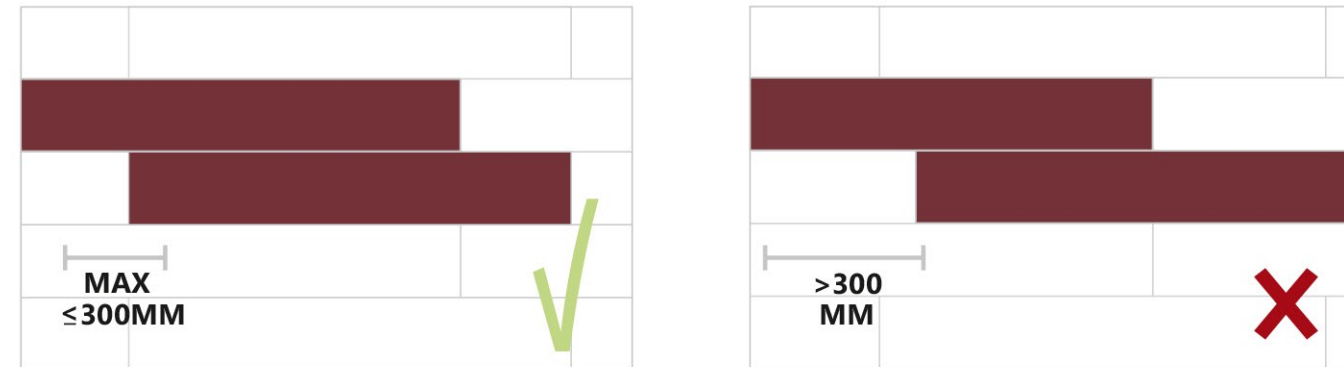

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES

