

# SLATE



**200 X 1200 MM**

[www.sponzoceramica.com](http://www.sponzoceramica.com)



**SLATE**



SERIES



**KALAHARI NATURAL**



**RUST COPPER**



**MINT ANTHRACITA**



# SLATS



# SLATE KALAHARI BEIGE





200X  
1200MM

RANDOM  
12





# SLATE KALAHARI BEIGE

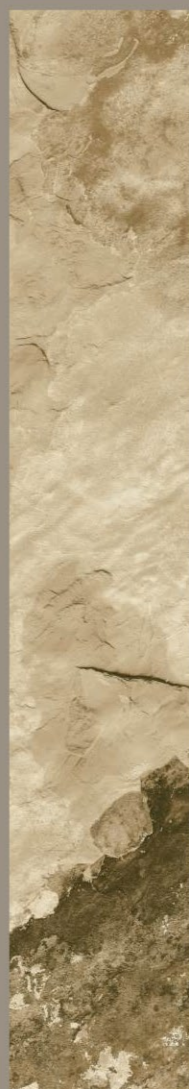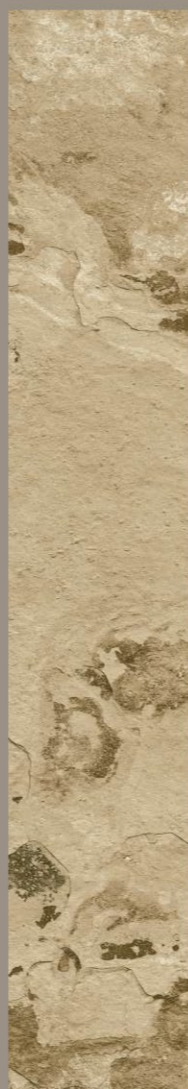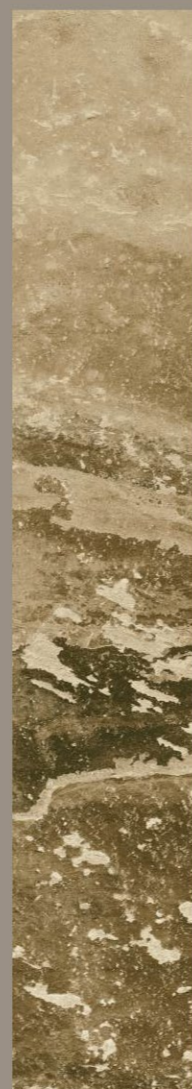

PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7


PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12

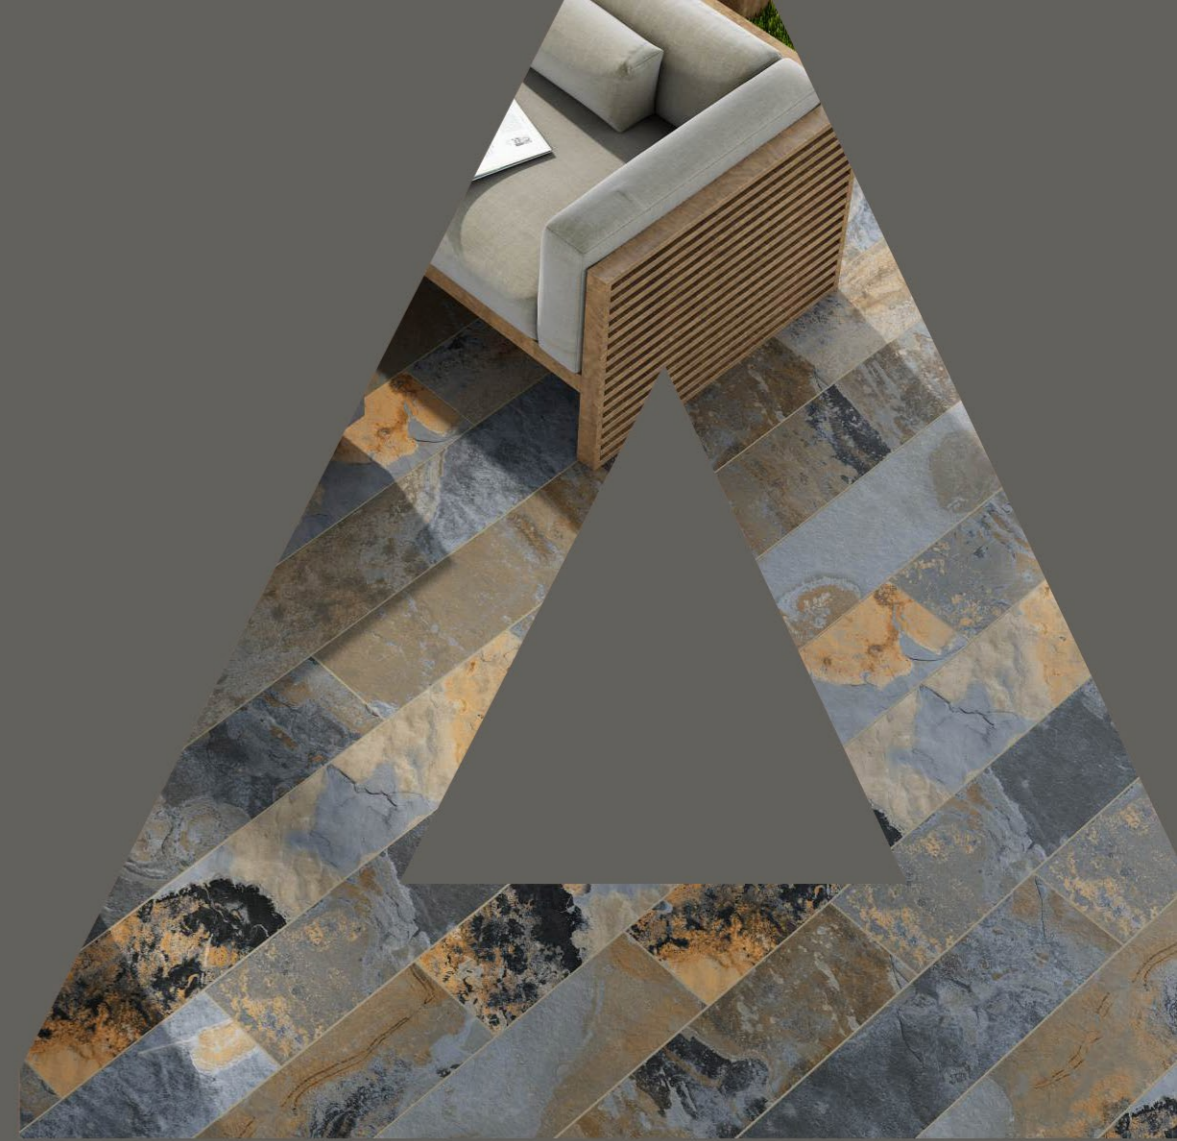

# SLATE KALAHARI NATURAL


200X  
1200MM

RANDOM  
15





# SLATE KALAHARI NATURAL

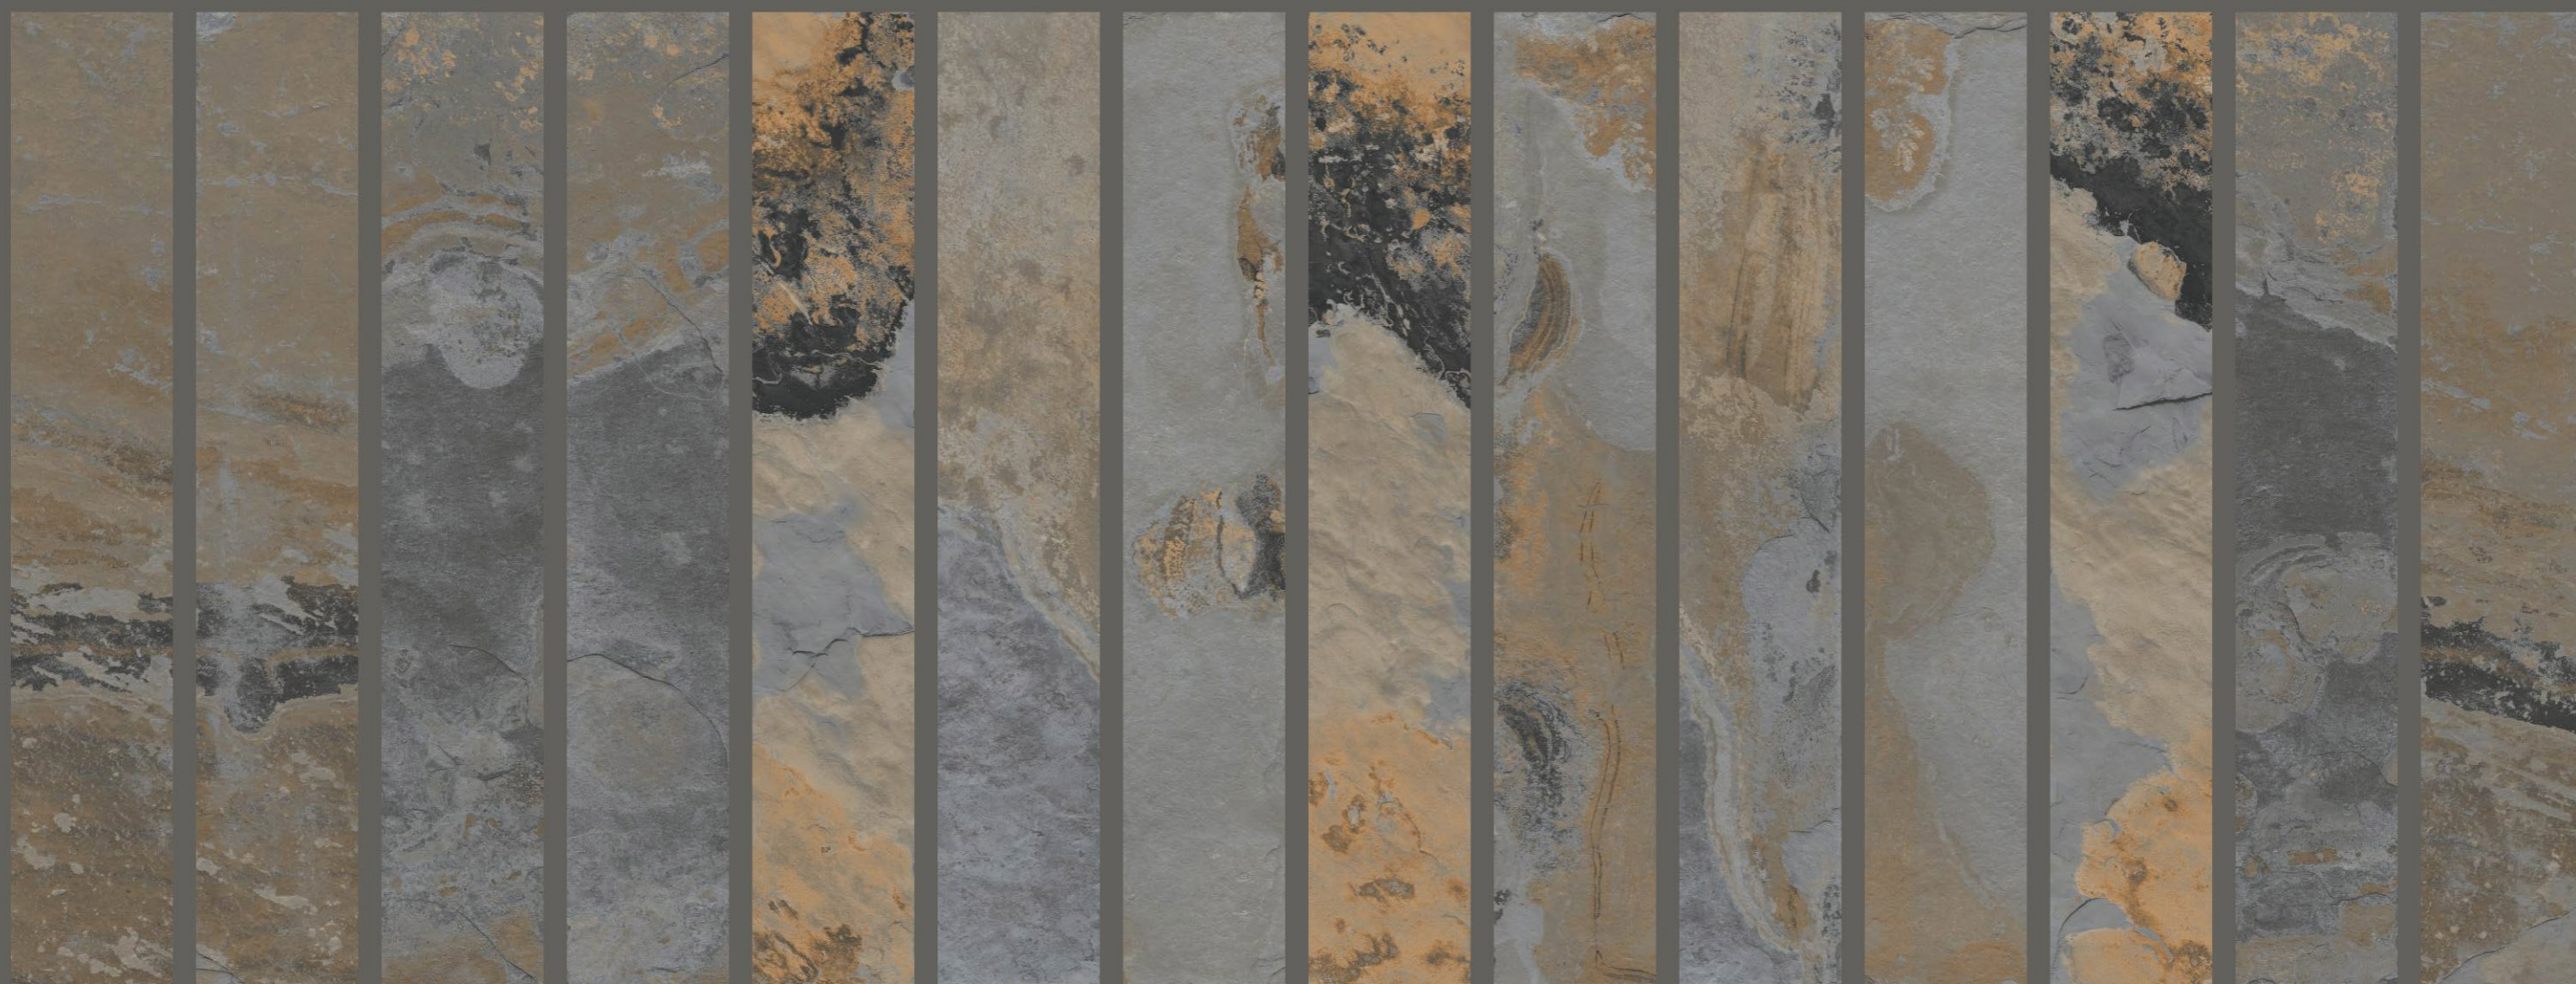

PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12

PHASE - 13

PHASE - 14

PHASE - 15



# SLATE KALAHARI NATURAL





# SLATE RUST IVORY

200X  
1200MM      RANDOM  
12





# SLATE

## RUST IVORY



PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12

# SLATE RUST IVORY





# SLATE RUST COPPER

200X  
1200MM

RANDOM  
12





# SLATE

## RUST COPPER




PHASE - 2




PHASE - 3



PHASE - 4

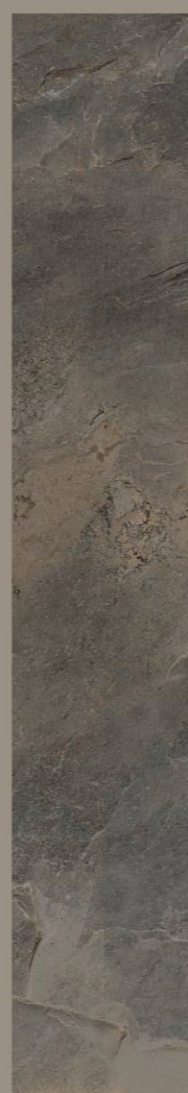

PHASE - 5

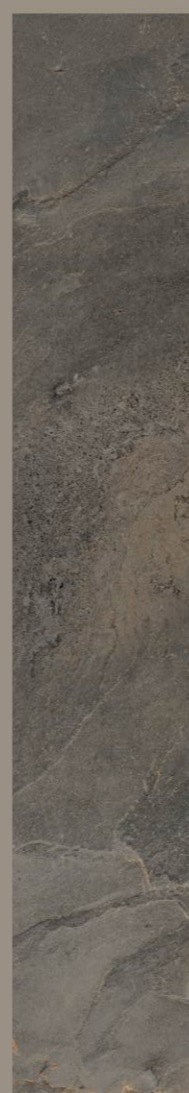


PHASE - 6



PHASE - 7



PHASE - 8

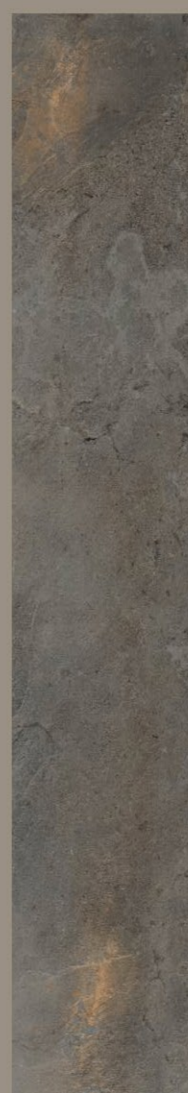


PHASE - 9



PHASE - 10



PHASE - 11

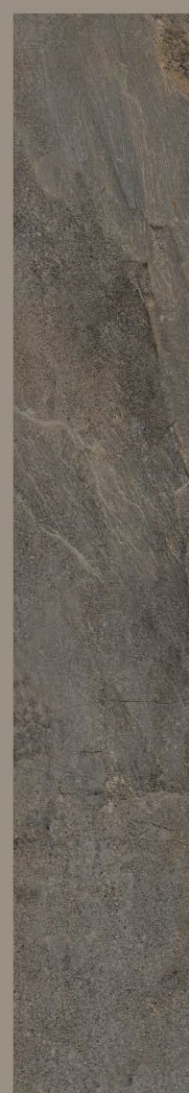

PHASE - 12

# SLATE RUST COPPER





# SLATE MINT ANTHRACITA

200X  
1200MM

RANDOM  
12





# SLATE MINT ANTHRACITA



PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12

# SLATE MINT ANTHRACITA





# SLATE MINT GRAPHITE

200X  
1200MM

RANDOM  
12





# SLATE MINT GRAPHITE



PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12



# SLATE MINT CERMA


200X  
1200MM

RANDOM  
12





# SLATE MINT CERMA

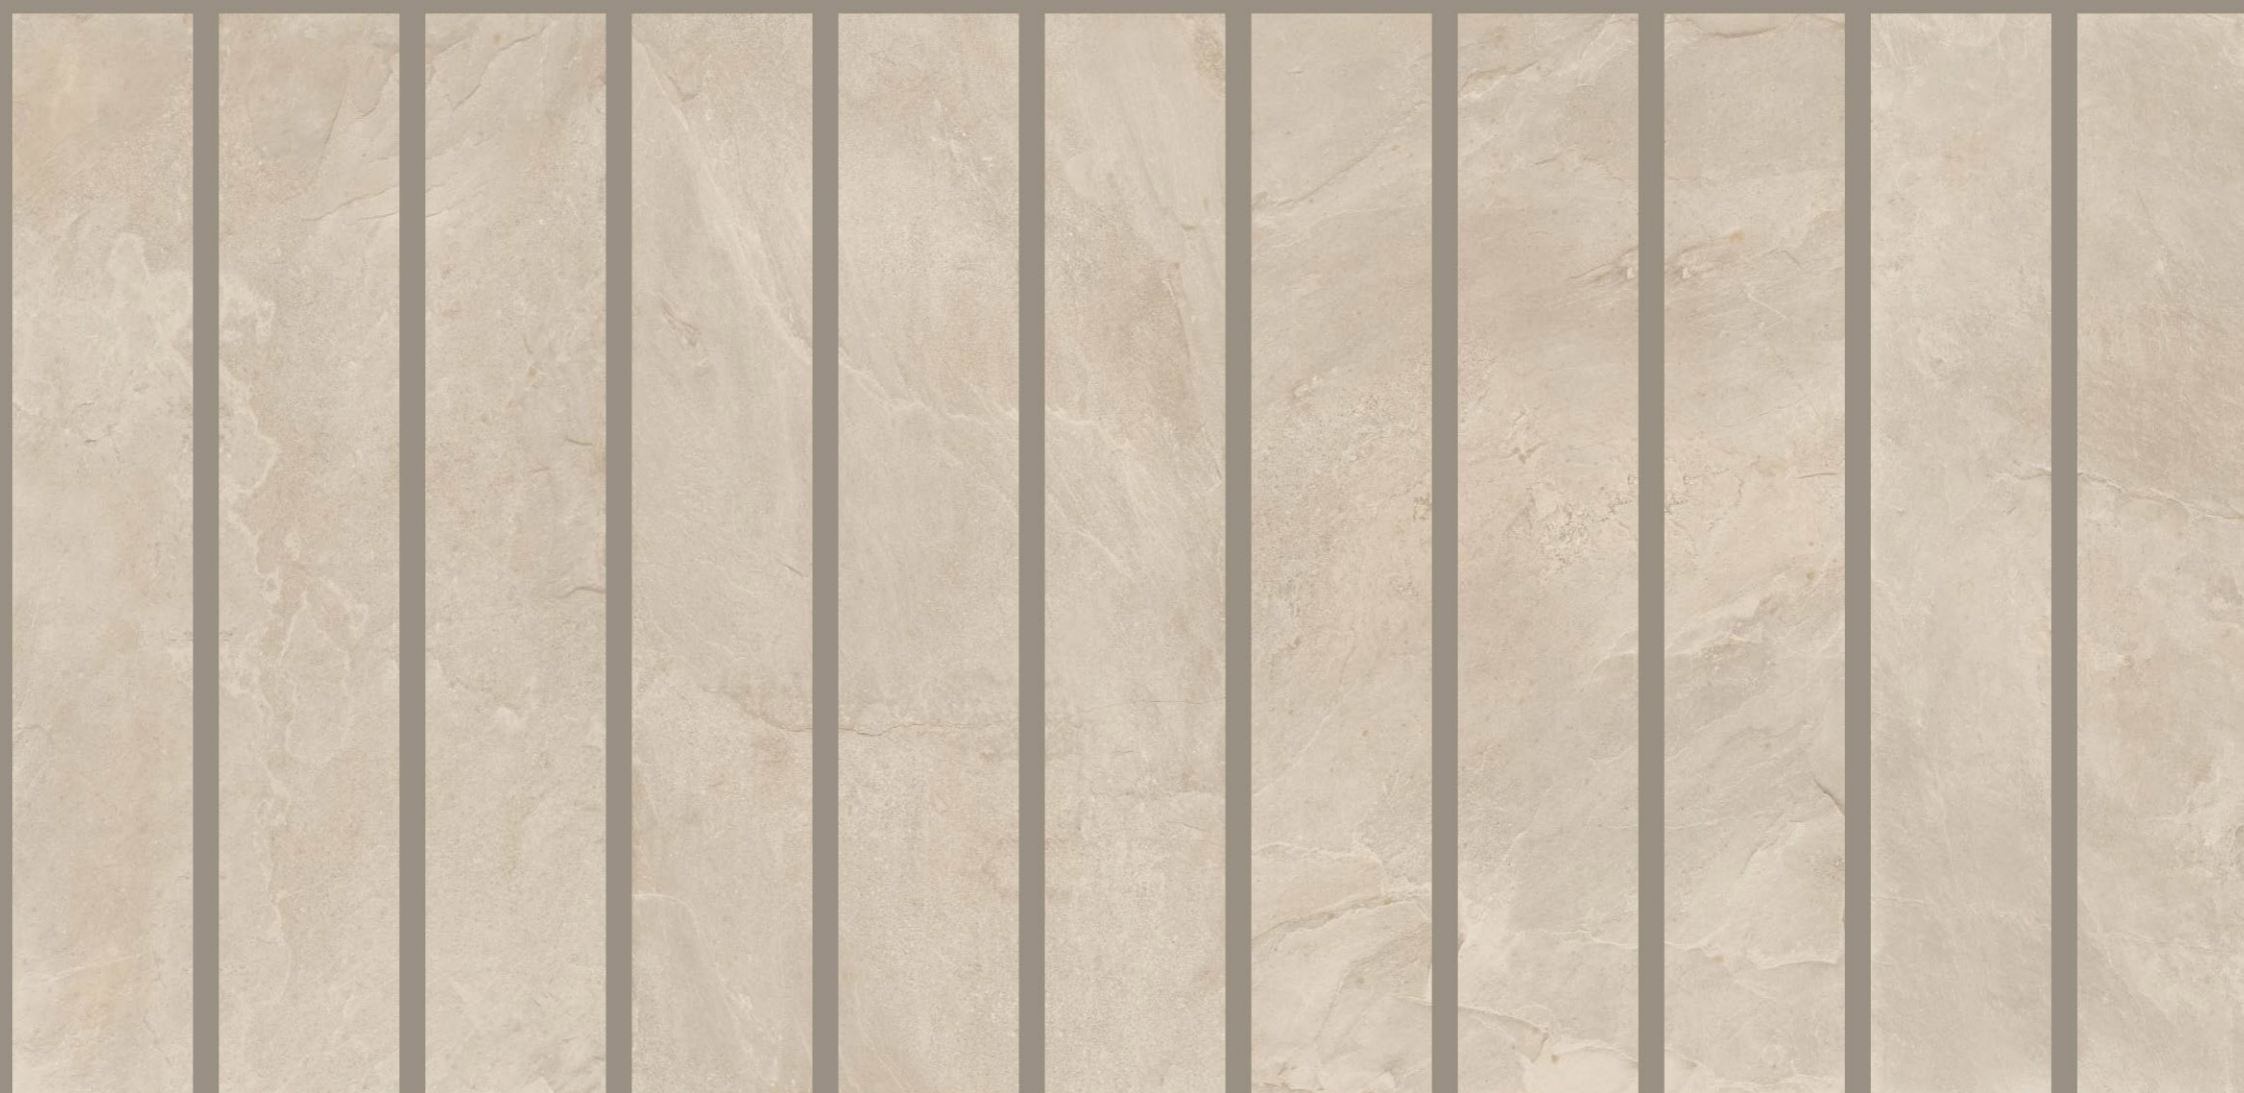

PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9

PHASE - 10

PHASE - 11

PHASE - 12



# SLATE MINT MOKA



200X  
1200MM

RANDOM  
12





# SLATE MINT MOKA

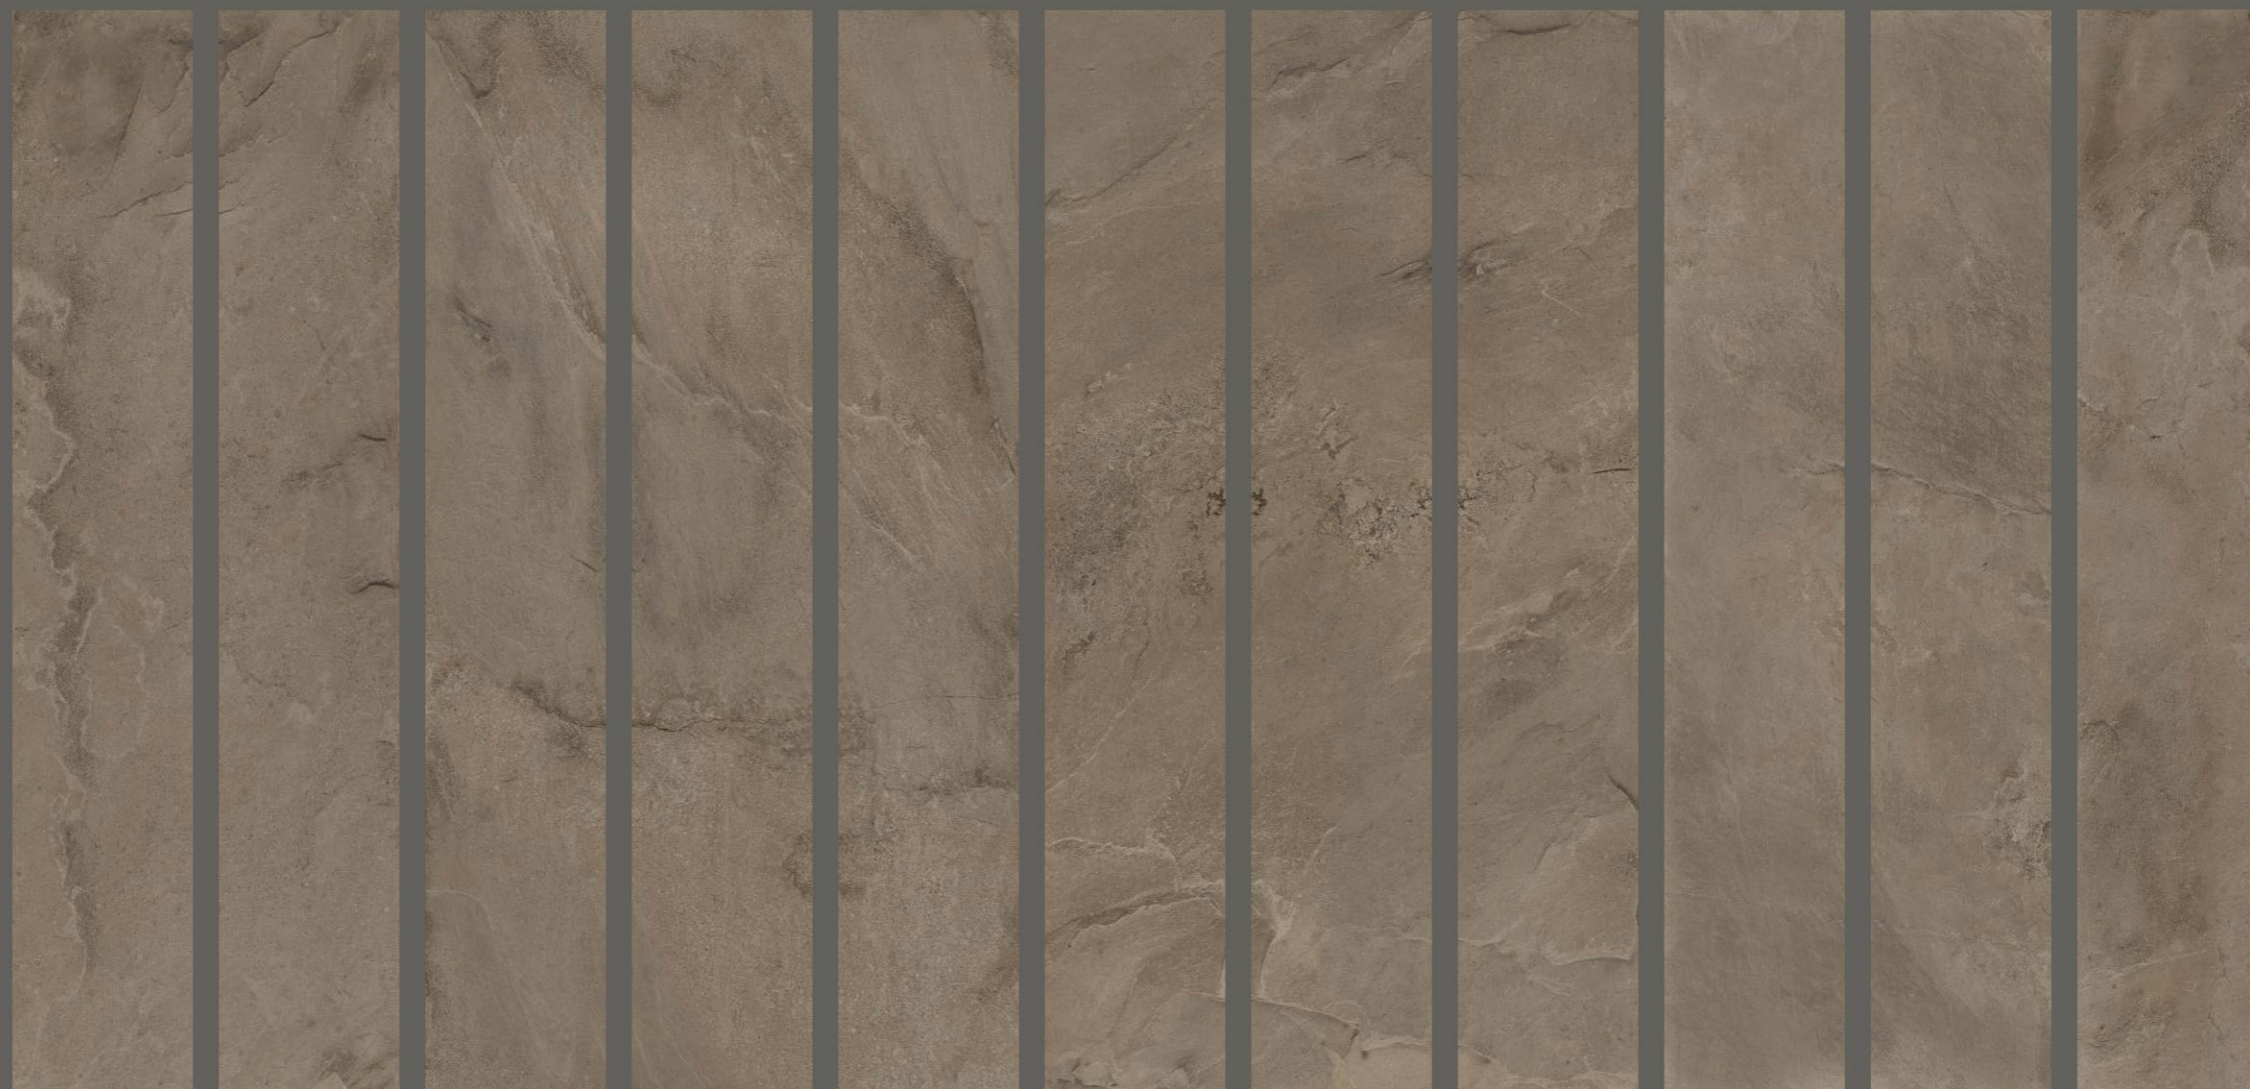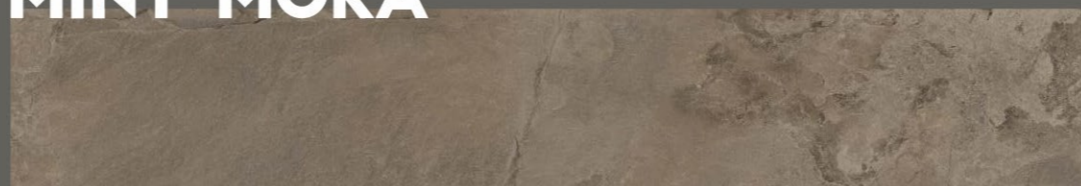

PHASE - 2

PHASE - 3

PHASE - 4

PHASE - 5

PHASE - 6

PHASE - 7

PHASE - 8

PHASE - 9


PHASE - 10

PHASE - 11

PHASE - 12



### LAYING SOLUTIONS

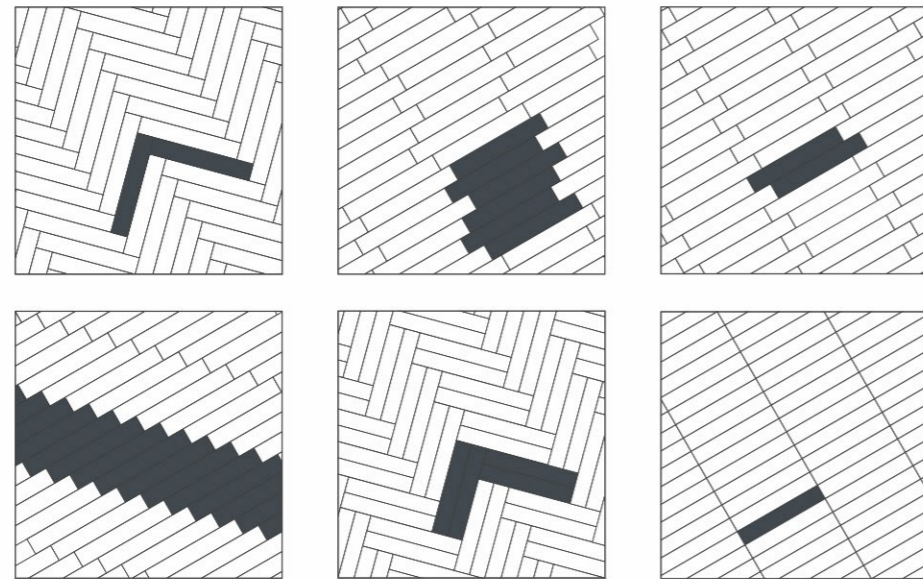


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

### PORCELAIN STONWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupture		R ≥ 35 N/mm <sup>2</sup>	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>-6</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



### INSTALLATION ADVICE

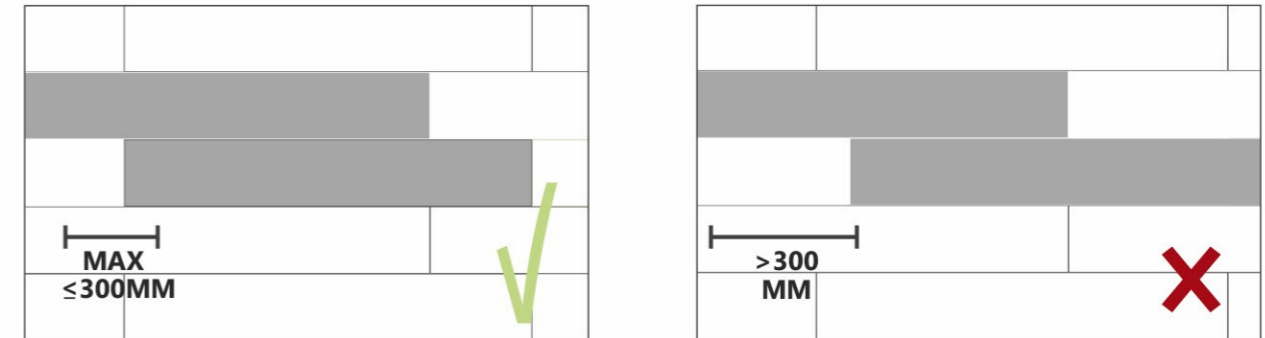

The longest side should be staggered no more than 300mm when laid in running bond.

### V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

### PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

### FEATURES

